

o G2 G3 G4 E1 E3 CR C7 C9 M11 N14

0445120298 Common Rail Diesel Injector Technical File SKU: Z1W20445120298



COMMON RAIL DIESEL INJECTOR



0445120298 Common Rail Diesel Injector Technical File

Content

| 1. 0445120298 Common Rail Diesel Injector Introduction | 2 |
|--|-------|
| 1.1. 0445120298 Common Rail Diesel Injector Basic Information | 2 |
| 1.2. 0445120298 Common Rail Diesel Injector Common Information | 2 |
| 1.3. 0445120298 Common Rail Diesel Injector Part Number Common Writing | 7 |
| 1.4. 0445120298 Common Rail Diesel Injector Parameter | 7 |
| 1.5. 0445120298 Common Rail Diesel Injector Customized Service | 8 |
| 1.6. 0445120298 Common Rail Diesel Injector Packing List and Package Size | 8 |
| 1.7. 0445120298 Common Rail Diesel Injector Quality Control | 10 |
| 1.8. 0445120298 Common Rail Diesel Injector Testing Standard and Certificate | 10 |
| 1.9. 0445120298 Common Rail Diesel Injector Warranty Instructions | 11 |
| 2. 0445120298 Common Rail Diesel Injector Technical Support | 12 |
| 2.1. 0445120298 Common Rail Diesel Injector Part Number Location | 12 |
| 2.2. 0445120298 Common Rail Diesel Injector Application Scenarios | |
| 2.3. 0445120298 Common Rail Diesel Injector Installation Precautions | 13 |
| 2.4. Reasons For 0445120298 Common Rail Diesel Injector Not Working Normally | 14 |
| 2.5. Causes of 0445120298 Common Rail Diesel Injector Being Damaged | 14 |
| 2.6. 0445120298 Common Rail Diesel Injector Storage Standard | 15 |
| 2.7. 0445120298 Common Rail Diesel Injector Technical Support Obtaining Methods | 15 |
| 3. 0445120298 Common Rail Diesel Injector Purchase and Delivery | 16 |
| 3.1. 0445120298 Common Rail Diesel Injector Purchase Payment Term | 16 |
| 3.2. 0445120298 Common Rail Diesel Injector Main Sales Markets | 16 |
| 3.3. 0445120298 Common Rail Diesel Injector Declaration Requirements | 16 |
| 3.4. 0445120298 Common Rail Diesel Injector Shipping Ways | 16 |
| 3.5. 0445120298 Common Rail Diesel Injector Lead time | 16 |
| 3.6. 0445120298 Common Rail Diesel Injector Logistics Time for Destination Out of China's Ar | eas16 |
| 3.7. 0445120298 Common Rail Diesel Injector Packing | 17 |
| 4. Company Information | 17 |
| 4.1. Company Introduction | 18 |
| 4.2. Contact Information | 18 |
| 5. Copyright Statement | 18 |



0445120298 Common Rail Diesel Injector Technical File

1. 0445120298 Common Rail Diesel Injector Introduction

1.1. 0445120298 Common Rail Diesel Injector Basic Information

| Title | 0445120298 Common Rail Diesel Injector China Made New |
|-------|---|
| SKU | Z1W20445120298 |

1.2. 0445120298 Common Rail Diesel Injector Common Information

(1) Common Rail Diesel Injector Exchange Information

| Common Rail Diesel Injector Part Number | Universal Part Number | Re-manufactured Part Number |
|--|-----------------------|-----------------------------|
| 0445120298 | 0445120299 | 0 986 435 622 |
| 0443120298 | / | 0 980 455 022 |

(2) Common Rail Diesel Injector Application Information

| Common Rail Diesel Injector Part Number | MERCEDES-BENZ Car Model | | | | | | | |
|--|-------------------------|-----------------|--------------------|---------------------|----------|----------|--|--|
| 0445120298 | 47007000 87 | A4700700 087 | 47007000 870080 | A4700700 0870080 | / | / | | |
| 0445120299 | 47007000 | A4700700 | 47007000 | 47007000 | A4700700 | A4700700 | | |
| 0445120255 | 87 | 087 | 870080 | 8780 | 0870080 | 08780 | | |
| 0 986 435 622 | 47007000 | A4700700 | 47007000 | A4700700 | A4700700 | 47007000 | | |
| 0 980 433 022 | 870080 | 0870080 | 87 | 08780 | 087 | 8780 | | |

(3) Common Rail Diesel Injector Matching Information

| <u> </u> | | | | - | | | | 1 | | | |
|-----------------------|---------------------|------------------------|--------------|--------------------|-------------|----------------|-----------------------|-------------------|--------------|----------|-------------------|
| Vehicle brand | Series | Car Model | Engine Model | Production date | Power KW | Horse power | Emission Standards | Manufacturer | Emissions(L) | Cylinder | Power Source V |
| MERC EDES- BENZ | Actro s [963] | Actros 1833 L,LS | 470.906 | 2012/07 | 240 | 326 | | MERCEDES- BENZ | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Actro s [963] | Actros 1836 L,LS | 470.906 | 2012/07 | 265 | 360 | | MERCEDES- BENZ | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Actro s [963] | Actros 1840 L,LS | 470.906 | 2012/07 | 290 | 394 | | MERCEDES- BENZ | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Actro s [963] | Actros 2033 L,LS | 470.906 | 2012/07 | 240 | 326 | 5 . <u>Ar</u> | MERCEDES- BENZ | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Actro s [963] | Actros 2633 L,LS | 470.906 | 2012/07 | 240 | 326 | 2 2 | MERCEDES- BENZ | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Actro s [963] | Actros 2636 L,LS | 470.906 | 2012/07 | 265 | 360 | | MERCEDES- BENZ | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Actro s [963] | Actros 2640 L,LS | 470.906 | 2012/07 | 290 | 394 | 2 | MERCEDES- BENZ | 10.7 | 6 | 24 |



| | | | | | | | - | | | | |
|-----------------------|-----------------------------|--------------------------------|------------|----------|-----|-----|-------|-------------------|-------|---|----|
| MERC EDES- | Actro s | Actros 2643 | 470.906 | 2012/07 | 315 | 428 | | MERCEDES- | 10.7 | 6 | 24 |
| BENZ MERC | [963] Actro | L,LS Actros | | | | | - | BENZ | 100 C | | |
| EDES- BENZ | s [963] | 3333 L,LS | 470.906 | 2013/03 | 240 | 326 | | MERCEDES- BENZ | 10.7 | 6 | 24 |
| MERC EDES- | Actro s | Actros 3336 | 470.906 | 2013/03 | 265 | 360 | 1 | MERCEDES- | 10.7 | 6 | 24 |
| BENZ MERC | [963] Actro | L,LS Actros | | | | | | BENZ | | | |
| EDES- BENZ | s [963] | 3340 L,LS | 470.906 | 2013/03 | 290 | 394 | | MERCEDES- BENZ | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Actro s [963] | Actros 3343 L,LS | 470.906 | 2013/03 | 315 | 428 | 6-17. | MERCEDES- BENZ | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 1833 | 470.90 | 2013/04 | 240 | 326 | 57 | MERCEDES- BENZ | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 1836 | 470.90 | 2013/04 | 265 | 360 | | MERCEDES- BENZ | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 1840 | 470.90 | 2013/04 | 290 | 394 | | MERCEDES- BENZ | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 2033 | 470.90 | 2013/04 | 240 | 326 | 17 | MERCEDES- BENZ | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 2036 | 470.90 | 2013/04 | 265 | 360 | | MERCEDES- BENZ | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 2040 | 470.90 | 2013/04 | 290 | 394 | 64 | MERCEDES- BENZ | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 2043 | 470.90 | 2013/04 | 315 | 428 | | MERCEDES- BENZ | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 3333 | 470.90 | 2013/04 | 240 | 326 | 22 | MERCEDES- BENZ | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 3336 | 470.90 | 2013/04 | 265 | 360 | 12 | MERCEDES- BENZ | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 3340 | Arocs 3340 | 2013/04 | 290 | 394 | | MERCEDES- BENZ | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 3343 | 470.90 | 2013/04 | 315 | 428 | | MERCEDES- BENZ | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 4133 | 470.90 | 2013/04 | 240 | 326 | 2 2 | MERCEDES- BENZ | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 4136 | 470.90 | 2013/04 | 265 | 360 | | MERCEDES- BENZ | 10.7 | 6 | 24 |
| MERC EDES- BENZ | [964] Aroc s [964] | Arocs 4140 | 470.90 | 2013/04 | 290 | 394 | 3. / | MERCEDES- BENZ | 10.7 | 6 | 24 |
| MERC EDES- | Actro s | Actros 1833 | 470.9 | 2012/07- | 240 | 326 | | | 10.7 | 6 | 24 |
| BENZ MERC EDES- | [963] Actro s | L,LS Actros 1836 L,LS | 470.9 | 2012/07- | 265 | 360 | | | 10.7 | 6 | 24 |



| | MERC EDES- | Actro s | Actros 1840 | 470.9 | 2012/07- | 290 | 394 | | | 10.7 | 6 | 24 |
|----|---------------|------------|----------------|-------|--|-----|-----|---------------------|--|----------------|------------|-----------|
| | BENZ | [963] | L,LS | | / 0 / | 200 | | | 1.00 | | | |
| | MERC | Actro | Actros | | | | | | And the production | | | |
| | EDES- | S | 1843 | 470.9 | 2012/07- | 315 | 428 | | | 10.7 | 6 | 24 |
| | BENZ | [963] | L,LS | | | | | | | | | |
| | MERC | Actro | Actros | 470.0 | 2012/07 | 240 | 226 | | and the second second | 10.7 | 6 | 24 |
| | EDES- BENZ | s [963] | 2033 L,LS | 470.9 | 2012/07- | 240 | 326 | | | 10.7 | 6 | 24 |
| | MERC | Actro | Actros | | | | | | | | | |
| | EDES- | S | 2036 | 470.9 | 2012/07- | 265 | 360 | | | 10.7 | 6 | 24 |
| | BENZ | [963] | L,LS | | , ., | 200 | | | | | | |
| | MERC | Actro | Actros | | | | | | 100 C | And the second | April 1997 | |
| | EDES- | s | 2040 | 470.9 | 2013/03- | 290 | 394 | and a second | | 107 | 6 | 24 |
| | BENZ | [963] | L,LS | | | | | | | | | |
| | MERC | Actro | Actros | | | | | | | | | |
| | EDES- | S | 2043 | 470.9 | 2013/03- | 315 | 428 | | 1.1.1 | 10.7 | 6 | 24 |
| | BENZ | [963] | L,LS | | | | | | and the second second second | | | |
| | MERC | Actro | Actros | 170.0 | | | | | | | | |
| | EDES- | S [OC2] | 2433 | 470.9 | 2012/07- | 240 | 326 | | | 10.7 | 6 | 24 |
| | BENZ | [963] | LS | | | | | | | | | |
| | MERC EDES- | Actro s | Actros 2436 | 470.9 | 2012/07- | 265 | 360 | 1.00 | | 10.7 | 6 | 24 |
| | BENZ | [963] | LS | 470.5 | 2012/07- | 205 | 500 | | | 10.7 | 0 | 24 |
| | MERC | Actro | Actros | | | | | | | | | |
| | EDES- | s | 2440 | 470.9 | 2012/07- | 290 | 394 | | | 10.7 | 6 | 24 |
| | BENZ | [963] | LS | | , | | | | | | | |
| | MERC | Actro | Actros | | | | | ALC: NO TO DO TO DO | and the second sec | | | |
| | EDES- | s | 2533 | 470.9 | 2012/07- | 240 | 326 | Euro 6 | | 10.7 | 6 | 24 |
| | BENZ | [963] | L,LS | | | | | | | | | |
| | MERC | Actro | Actros | | | | | 1000 | | 1.1 | | |
| | EDES- | S | 2536 | 470.9 | 2012/07- | 265 | 360 | Euro 6 | | 10.7 | 6 | 24 |
| | BENZ | [963] | L,LS | | | | | | | | | |
| | MERC | Actro | Actros | 170.0 | a a 4 a /a = | | | | | | | |
| | EDES- | S [OCO] | 2540 | 470.9 | 2012/07- | 290 | 394 | Euro 6 | | 10.7 | 6 | 24 |
| | BENZ | [963] | L,LS | | | | | - | | | | |
| | MERC EDES- | Actro s | Actros 2543 | 470.9 | 2012/07- | 315 | 428 | Euro 6 | - | 10.7 | 6 | 24 |
| | BENZ | s [963] | L,LS | 470.9 | 2012/07- | 515 | 420 | EULOO | | 10.7 | 6 | 24 |
| | MERC | Actro | Actros | | | | | | | | | |
| | EDES- | s | 2633 | 470.9 | 2012/07- | 240 | 326 | Euro 6 | | 10.7 | 6 | 24 |
| | BENZ | [963] | L,LS | | , | | 010 | | | 1017 | | |
| | MERC | Actro | Actros | | and the second second | | | | | | | |
| | EDES- | s | 2636 | 470.9 | 2012/07- | 265 | 360 | Euro 6 | | 10.7 | 6 | 24 |
| | BENZ | [963] | L,LS | | | | | | - | | | |
| | MERC | Actro | Actros | | | | | | 1 A A A | | | A DECK DO |
| | EDES- | S | 2640 | 470.9 | 2012/07- | 290 | 394 | Euro 6 | | 10.7 | 6 | 24 |
| ļ | BENZ | [963] | L,LS | | and the second s | | | | | | | |
| | MERC | Actro | Actros | | 0.010/1 | | | | | | | |
| | EDES- | S [OCD] | 2643 | 470.9 | 2012/07- | 315 | 428 | Euro 6 | 22 5 | 10.7 | 6 | 24 |
| | BENZ | [963] | L,LS | | - | | | | | | | |
| | MERC EDES- | Actro | Actros | 170.0 | 2013/03- | 240 | 326 | Euro 6 | | 10.7 | 6 | 24 |
| ļ | BENZ | s [963] | 3333 L,LS | 470.9 | 2013/03- | 240 | 320 | Euro 6 | | 10.7 | 6 | 24 |
| ļ | MERC | Actro | Actros | | | | | | | | | |
| | EDES- | s | 3336 | 470.9 | 2013/03- | 265 | 360 | Euro 6 | | 10.7 | 6 | 24 |
| ļ | BENZ | [963] | L,LS | | , 00 | | 200 | _0.00 | | | | |
| ļ | MERC | Actro | Actros | | | | | | 1 | | | |
| ļ | EDES- | S | 3340 | 470.9 | 2013/03- | 290 | 394 | Euro 6 | | 10.7 | 6 | 24 |
| ļ | BENZ | [963] | L,LS | | | | | | 1999 B | | | |
| ļ | MERC | Actro | Actros | | | | | | | | | |
| | EDES- | S | 3343 | 470.9 | 2013/03- | 315 | 428 | Euro 6 | | 10.7 | 6 | 24 |
| i. | BENZ | [963] | L,LS | | | | | | | | | |



| | | | | and the second se | | | | | | | |
|-----------------------|-----------|-----------------------|-------|---|-----|-----|--------|------------|------|---|----|
| MERC EDES- BENZ | Anto s | Antos 1833 L,LS | 470.9 | 2012/09- | 240 | 326 | Euro 6 | R | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Anto s | Antos 1836 L,LS | 470.9 | 2012/09- | 265 | 360 | Euro 6 | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Anto s | Antos 1840 L,LS | 470.9 | 2012/09- | 290 | 394 | Euro 6 | 57 | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Anto s | Antos 1843 L,LS | 470.9 | 2012/09- | 315 | 428 | Euro 6 | _ | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Anto s | Antos 2033 L,LS | 470.9 | 2013/03- | 240 | 326 | Euro 6 | 200 | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Anto s | Antos 2036 L,LS | 470.9 | 2013/03- | 265 | 360 | Euro 6 | 12 | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Anto s | Antos 2040 L,LS | 470.9 | 2013/03- | 290 | 394 | Euro 6 | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Anto s | Antos 2043 L,LS | 470.9 | 2013/03- | 315 | 428 | Euro 6 | - EE | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Anto s | Antos 2433 LS | 470.9 | 2012/09- | 240 | 326 | Euro 6 | 57 | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Anto s | Antos 2436 LS | 470.9 | 2012/09- | 265 | 360 | Euro 6 | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Anto s | Antos 2440 LS | 470.9 | 2012/09- | 290 | 394 | Euro 6 | <u> </u> | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Anto s | Antos 2443 LS | 470.9 | 2012/09- | 315 | 428 | Euro 6 | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Anto s | Antos 2533 L,LS | 470.9 | 2012/09- | 240 | 326 | Euro 6 | 1 | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Anto s | Antos 2536 L,LS | 470.9 | 2012/09- | 265 | 360 | Euro 6 | 1 5 | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Anto s | Antos 2540 L,LS | 470.9 | 2012/09- | 290 | 394 | Euro 6 | _ | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Anto s | Antos 2543 L,LS | 470.9 | 2012/09- | 315 | 428 | Euro 6 | 5 81 | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Anto s | Antos 2633 L,LS | 470.9 | 2012/09- | 240 | 326 | Euro 6 | R 5 | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Anto s | Antos 2636 L,LS | 470.9 | 2012/09- | 265 | 360 | Euro 6 | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Anto s | Antos 2640 L,LS | 470.9 | 2012/09- | 290 | 394 | Euro 6 | <u>R</u> é | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Anto s | Antos 2643 L,LS | 470.9 | 2012/09- | 315 | 428 | Euro 6 | | 10.7 | 6 | 24 |
| MERC EDES- | Anto s | Antos 3333 | 470.9 | 2013/03- | 240 | 326 | | | 10.7 | 6 | 24 |



| MERC EDES- BENZ | Anto s | Antos 3336 L,LS | 470.9 | 2013/03- | 265 | 360 | | 572 | 10.7 | 6 | 24 |
|-----------------------|--------------------|-----------------------|-------|----------|-------------|-------------|------------|-------------|------|---|----|
| MERC EDES- BENZ | Anto s | Antos 3340 L,LS | 470.9 | 2013/03- | 290 | 394 | Euro 6 | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Anto s | Antos 3343 L,LS | 470.9 | 2013/03- | 315 | 428 | Euro 6 | <u>-</u> 1. | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 1833 | 470.9 | 2013/04- | 240 | 326 | | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 1836 | 470.9 | 2013/04- | 265 | 360 | | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 1840 | 470.9 | 2013/04- | 290 | 394 | . . | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 1843 | 470.9 | 2013/04- | 315 | 428 | | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 2033 | 470.9 | 2013/04- | 240 | 326 | | <u> </u> | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 2036 | 470.9 | 2013/04- | 265 | 360 | Euro 6 | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 2040 | 470.9 | 2013/04- | 290 | 394 | Euro 6 | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 2043 | 470.9 | 2013/04- | 315 | 428 | Euro 6 | 17 | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 2533 | 470.9 | 2013/04- | 240 | 326 | | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 2536 | 470.9 | 2013/04- | 265 | 360 | | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 2540 | 470.9 | 2013/04- | 290 | 394 | 57 | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 2543 | 470.9 | 2013/04- | 315 | 428 | | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 2633 | 470.9 | 2013/04- | 240 | 326 | | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 2636 | 470.9 | 2013/04- | 265- 315 | 360- 428 | 1 2 | 2 5 | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 2640 | 470.9 | 2013/04- | 265- 290 | 360- 394 | | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 2643 | 470.9 | 2013/04- | 315 | 428 | 2 4 | Z é | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 3233 | 470.9 | 2013/04- | 240 | 326 | | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 3236 | 470.9 | 2013/04- | 265 | 360 | | | 10.7 | 6 | 24 |

| DIESEL INJEC | TOR | | www | .comm | onrai | Idiese | linjecte | or.com | | | |
|-----------------------|--------------------|-----------------|---------|----------|-------|--------|----------|--------|------|---|----|
| MERC EDES- BENZ | Aroc s [964] | Arocs 3240 | 470.9 | 2013/04- | 290 | 394 | | 52 | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 3243 | 470.9 | 2013/04- | 315 | 428 | | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 3333 | 470.9 | 2013/04- | 240 | 326 | | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 3336 | 470.9 | 2013/04- | 265 | 360 | | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 3340 | 470.9 | 2013/04- | 290 | 394 | | 20 | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 3343 | 470.9 | 2013/04- | 315 | 428 | R | 57 | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 4133 | 470.9 | 2013/04- | 240 | 326 | | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 4136 | 470.9 | 2013/04- | 265 | 360 | | 2.5 | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 4140 | 470.9 | 2013/04- | 290 | 394 | | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Aroc s [964] | Arocs 4143 | 470.9 | 2013/04- | 315 | 428 | | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Capa City | CapaC ity | 470.904 | 2015/01- | 290 | 394 | | | 10.7 | 6 | 24 |
| MERC EDES- BENZ | Citar o | Citaro G/ G? | 470.904 | 2012/05- | 265 | 360 | | | 10.7 | 6 | 24 |

1.3. 0445120298 Common Rail Diesel Injector Part Number Common Writing

0445120298, 0 445 120 298, 0445 120 298, 0445120 298, 0 445120298, 0 445120 298, 0445120299, 0 445 120 299, 0445 120 299, 0445120 299, 0 445120299, 0 445120 299, 0 986 435 622

1.4. 0445120298 Common Rail Diesel Injector Parameter Adaptation System: Common Rail System Common Rail Diesel Injector Series: 120 Series Parameter Performance: CRIN4-21 Matching Accessories: Gasket F 00R J02 554 (7.73*14.36*1.49) Common Rail Diesel Injector Type: Electromagnetic Common Rail Diesel Injector Support System Maximum Pressure: 1,600 Vehicle Configuration Information: MERCEDES-BENZ Common Rail Diesel Injector Size: 21.5cm*4 cm *4 cm Common Rail Diesel Injector Net Weight: 0.55kg Common Rail Diesel Injector Gross Weight: 0.6kg Common Rail Diesel Injector Quality: China Made New Common Rail Diesel Injector Package Size: 28cm*7 cm *7 cm



Common Rail Diesel Injector Type: Common Rail Diesel Injector Common Rail Diesel Injector MOQ: 4 Pieces

1.5. 0445120298 Common Rail Diesel Injector Customized Service

(1) Common Rail Diesel Injector Customized Service Coverage: Meet the customized needs of OEM manufacturers for shell lettering, logo engraving, common rail diesel injector internal packaging, common rail diesel injector external packaging and labels customized, etc.

| No. | 1 | 2 | 3 | 4 |
|-------|--|--|--|--|
| Image | 20081 | Made In Germany A4700700087 See Leer I E Cold edistores | | JA IAA IAAAAA IAAAAAAAAAAAAAAAAAAAAAAAAA |
| Name | Common Rail Diesel Injector Nozzle Engraving | Injector housing engraving and QR code | Common Rail Diesel Injector Solenoid Valve Engraving | Common Rail Diesel Injector Box And Label |

(2) Common Rail Diesel Injector Customized Service Requirements:

- ① The purchase of customized common rail diesel injectors are not less than 10 pieces.
- ② The purchase of customized common rail diesel injector packages are no less than 1000 pieces.

When the customized products involve the need of specify logo, the OEM manufacturer is asked to provide trademark authorization and the sample of logo image file.

• Once the customized common rail diesel injector is sold, it cannot be returned or exchanged if there is no quality problems.

1.6. 0445120298 Common Rail Diesel Injector Packing List and Package Size

(1) Common Rail Diesel Injector Spare Parts List

| No. | 1 | 2 | 3 |
|-------------|--|---|--|
| Image | | \bigcirc | 0 |
| Name | Common Rail Diesel Injector | O-ring | Gasket F 00R J02 554 |
| Description | Common rail diesel injector part number: 0445120298 | Ensure to meet the standard of the sealing performance between the common rail diesel injector and the engine | Made of brass, used to ensure the tight fit between the common rail diesel injector cap end and the engine |
| No. | 4 | 5 | 6 |
| Image | | | |

| Name | Nozzle Protective Protective Cover | Common Rail Diesel Injector Oil Inlet Hole Protective Cover | Common Rail Diesel Injector Oil Return Hole Protective Cover |
|-------------|--|---|--|
| Description | Protect nozzle holes from being polluted and blocked | Protect oil inlet from being polluted and blocked | Protect the solenoid valve body and terminals from being damaged by external forces |
| No. | 7 | 8 | 9 |
| Image | | | |
| Name | VCI Anti-rust Bag | Bubble Bag | Common Rail Diesel Injector Packing Box |
| Description | Prevent common rail diesel injector from rusting | Prevent the common rail diesel injector from being damaged by external forces | Place common rail diesel injector and common rail diesel injector accessories |

A Minors are forbidden to use the common rail diesel injector assembly, O-ring, gasket, nozzle protective cover, common rail diesel injector house protective cover, solenoid valve protective cover, VCI anti-rust bag, and air bubble bag to avoid personal injury.

• O-ring and gasket are disposable installation accessories, and need to be replaced for re-installation.

The nozzle protective cover, the common rail diesel injector house protective cover, and the solenoid valve protective cover are recyclable accessories that can be reused.

VCI anti-rust bags and bubble bags are non-degradable materials, please dispose of them properly after using.

The common rail diesel injector and the installation parts should be coated with appropriate sealing oil during installation.

(2) Common Rail Diesel Injector Box Size



Website : www.commonraildieselinjector.com © 2025 www.commonraildieselinjector.com



| Pic | No | 1 |
|------|-----|---|
| I IU | 110 | |

| No. | Name | Common Rail Diesel Injector Package Size (cm) |
|-----|--|---|
| 1 | Common Rail Diesel Injector Box | 28*7*7 |

1.7. 0445120298 Common Rail Diesel Injector Quality Control

(1) Common Rail Diesel Injector Testing

All common rail diesel injectors are tested for electrical characteristics, accuracy, high temperature, low temperature, withstand voltage, leakage, durability, and various working conditions.

(2) Common Rail Diesel Injector Assembling

For quality control during the production and installation process of common rail diesel injectors, our company strictly follows the standard product installation data and product installation steps for installation and testing, such as injector stroke test, injector solenoid valve tightening torque test, injector nozzle tightening torque test, etc.

(3) Common Rail Diesel Injector Inspection

The factory inspection of the common rail diesel injector is undergone full inspection, random inspection, and batch inspection three inspections. Different brands of test benches are used to test the same common rail diesel injector for more than three times for factory inspection, and the common rail diesel injector installation testing environment are progressed in dust-free workshop.

1.8. 0445120298 Common Rail Diesel Injector Testing Standard and Certificate

We can provide the factory quality inspection test report of each common rail diesel injector to ensure that each common rail diesel injector delivered meets the engine performance indicators.

| BOTEN | Ma | 服告 | 4.05.2019 | 10:42:09 | | | |
|---|------------|---------------|----------------------|----------|-----------------------|--|--|
| 录伸企业: | | | | | - | | |
| 425: | 181 | t: | | | | | |
| 300.440 | | | | | | | |
| 倍高: 。 客户数据: | 124 | 明人: | | | | | |
| teie: | 27.8 | 全单位: | | | | | |
| - Die | 2015 | 2 7 1. | | | 1 C 1 | | |
| 侍真: | WF | 白姓名: | | | | | |
| 林時說註: | | | | | | | |
| 2州名称: | 10年25 | | | | | | |
| 型号-零件号: | | | | | | | |
| - | | | | | | | |
| Filia: | | | | | | | |
| 100 March 1 | 检测 | 結果 | | | | | |
| 006000 : 0706000 1946 | | HEADER OPEN | 150 × 108 | | 1.1 | | |
| LEAK TEST: 38 | | 45 | 30.8.2.1.1.6 | ~ | states and the second | | |
| fade: ar | · · · | 35.7 | 411225 | * | | | |
| WIRENE 3.5 | 147 D±16.5 | 0 | ·····* | | | | |
| Max7 2013 | 218 5±14.4 | | ····· <u>b</u> ····· | ~ | | | |
| TL: 28.4 | 24.C±8.5 | •• | ····· | 4 | | | |
| U.; HO | 757±48 | 63 | | * | | | |
| VE: 42 | 4.5 ±1.8 | 0 | • | ¥ | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | 1000 | | |
| | | | | | | | |
| Let Let Let Let | eseses | 法规序列号。 | | 12 | | | |
| 推修前 重法后 | 6 | | | | | | |
| | | | | | 1.1 | | |

Website : <u>www.commonraildieselinjector.com</u> © 2025 <u>www.commonraildieselinjector.com</u>



Pic No.2

1.9. 0445120298 Common Rail Diesel Injector Warranty Instructions

(1) Product Warranty Conditions and Instructions

It is necessary to provide pictures, videos, or test reports detected by the common rail diesel injector inspection equipment as evidence to feed back to the salesman when the common rail diesel injector is abnormal during using.

Abnormal conditions are properly explained such as: 1.Smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. Oil leakage etc.

(2) Common Rail Diesel Injector Warranty Coverage

Within 15 days after customer receives the 0445120298 common rail diesel injector, if there is a performance failure and the product has no appearance damage, customer can choose to replace it or repair it;

If the 0445120298 common rail diesel injector has performance problems during the warranty period (3 months), and it is confirmed that it is product's problems after testing, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;

If the common rail diesel injector house has obvious scratches, it can only be repaired and it will be returned as it is if the product is confirmed to be fault-free.

A Tips: For products not covered by warranty, our company can provide paid maintenance services. For

products after paid repaired, the same performance problem will have a free warranty period within 3 months from the date of repairing.

(3) Common Rail Diesel Injector Out of Warranty Coverage

① The warranty period has expired.

2 Common rail diesel injector failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and used in abnormal environment.

③ Customer disassembles or repairs the common rail diesel injector personally resulting in damage to the common rail diesel injector.

④ Common rail diesel injector damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire).

5 Common rail diesel injector failure or common rail diesel injector damage caused by non-common rail diesel injector design, technology, manufacturing, quality and other issues.

6 Common rail diesel injector failure due to system pressure exceeding system approved pressure.

⑦ Common rail diesel injector failure caused by system voltage exceeding approved voltage.

8 Common rail diesel injector failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system fuel exceeding the standard requirements.

③ Common rail diesel injector failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).

(1) Common rail diesel injector failure caused by not following the installation angle specified in the vehicle engine maintenance manual.

11 Common rail diesel injector failure caused by not following the cleaning requirements specified in the vehicle engine maintenance manual.

12 Common rail diesel injector failure caused by failure to replace consumable parts as specified in the vehicle engine maintenance manual.



13 Common rail diesel injector failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.

14 Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the common rail diesel injector connection in accordance with the fuel intake system specified in the vehicle engine maintenance manual.

2. 0445120298 Common Rail Diesel Injector Technical Support

2.1. 0445120298 Common Rail Diesel Injector Part Number Location

E.g.: See the common rail diesel injector part number as follows:




| Pic No.3 | | | | |
|----------|---|--|--|--|
| No. Name | | | | |
| Α | Brand, logo, part number, series number | | | |
| в | Nozzle part number | | | |

2.2. 0445120298 Common Rail Diesel Injector Application Scenarios

Common rail system is an oil supply method refers to the Fuel oil from the fuel tank sucked out by the gear pump through the oil-water separator and the gear pump to Fuel fine filter, high-pressure pump, common rail pipe, and common rail diesel injector, all together with the closed-loop fuel supply system composed of sensors and ECU that completely separates the generation of injector pressure and the injector process from each other.



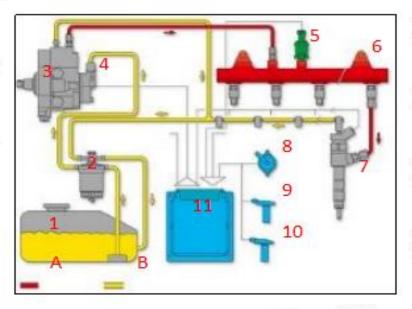

Pic No. 4

| No. | Name | No. | Name | No. | Name | No. | Name |
|-----|-----------------------|-----|--------------------------------|-----|--------------------------------|-----|------------------------------|
| 1 | Tank | 5 | Common Rail Pressure Sensor | 9 | Engine Crankshaft Sensor | A | High Pressure Oil Circuit |
| 2 | Fuel Filter | 6 | Common Rail Pipe 10 | | Camshaft Sensor | В | Low Pressure Oil Circuit |
| 3 | High-Pressure Pump | 7 | Common Rail Diesel Injector | 11 | ECU Electronic Control Unit | / | |
| 4 | Fuel Gear Pump | 8 | Accelerator Pedal | / | 1 | 1 | / |

2.3. 0445120298 Common Rail Diesel Injector Installation Precautions

- (1) The replacement of the common rail diesel injector must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual.
- (2) Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the common rail diesel injector, the fitting clearance of the common rail diesel injector connection, the installation angle and tightening torque of the common rail diesel injector, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the common rail diesel injector.
- (3) When installing the common rail diesel injector on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the common rail diesel injector, and ensure that there is no dust, carbon deposits, water, rust spots, etc.
- (4) Before installing, check whether the common rail diesel injector nozzle gasket has been replaced and installed on the CR Fuel injector.
- (5) When installing the common rail diesel injector, apply lubricant between the common rail diesel injector, fuel nozzle sealing gasket and O-ring.
- (6) Failure to replace the gasket with a new one may result in: deformation of the tight cap of nozzle, deformation of nozzle, deformation of nozzle orifice, oil leakage and air leakage, which will cause serious damage to the common rail diesel injector and nozzle to break and cause damage to the engine.
- (7) When installing the common rail diesel injector on the engine, please carefully check the components

related to the installation of the common rail diesel injector, such as the common rail diesel injector pressure plate, screw, common rail diesel injector rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual.

- (8) It is forbidden to operate the bare common rail diesel injector for a long time in an environment with serious dust pollution and corrosion to iron products.
- (9) It is forbidden to operate the bare common rail diesel injector for a long time in a strong magnetic field environment.

2.4. Reasons For 0445120298 Common Rail Diesel Injector Not Working Normally

- (1) There is air in the oil circuit of the engine fuel system.
- (2) Vehicle oil pump oil supply system is not normal.
- (3) Engine common rail system oil leakage or pressure limiting valve is damaged.
- (4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the common rail diesel injector of the vehicle.
- (5) The long-term placement of the common rail diesel injector causes the anti-rust oil to solidify, and the internal components are stuck or the oil holes are blocked.

A Before installing, carefully check whether other components in the common rail system except the CR

Fuel injector are damaged so as to prevent the common rail diesel injector from not working properly after being replaced.

2.5. Causes of 0445120298 Common Rail Diesel Injector Being Damaged

- (1) Failure to operate correctly according to the engine maintenance manual during disassembly and assembly resulted in damage to the common rail diesel injector.
- (2) The fuel used for the vehicle does not meet the standard, causing damage to the common rail diesel injector, such as: the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed the standard, etc.
- (3) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced during maintenance or the replaced filter cannot reach the original filter standard. All above reasons can cause damage to the common rail diesel injector.
- (4) The abrasion of the oil pump produces iron powder and aluminum powder enter the CR Fuel injector and cause damage to the common rail diesel injector.
- (5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the common rail diesel injector and causing damage to the common rail diesel injector.
- (6) The common rail diesel injector is damaged due to replacement or adjustment of the relevant parts of the common rail diesel injector. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the common rail diesel injector fails to meet the original standard.
- (7) The engine is overheated and overloaded for a long time working results in damage to the common rail diesel injector.
- (8) The common rail diesel injector will be damaged naturally at the end of its working life.
- (9) The common rail diesel injector is magnetized (common rail diesel injector parts' magnetic exceeded) causing the common rail diesel injector to not work properly.



Before replacing the common rail diesel injector, please check the engine parts carefully according to the engine maintenance manual to avoid the common rail diesel injector being damaged again after replacement.

2.6. 0445120298 Common Rail Diesel Injector Storage Standard

(1) Choose a Suitable Storage Place

The warehouse and cargo yard where the common rail diesel injector is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acids, alkali, salts and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry.

(2) Strict Requirements of Warehousing

Strict inspections should be carried out when the common rail diesel injectors are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do anti-rust treatment in time. Packaged common rail diesel injectors must be protected from damage.

(3) Keep The Warehouse Dry And Preventing Moisture

The relative humidity is usually below 70% for the common rail diesel injectors placed in the room, and the corrosion of the common rail diesel injectors is significantly reduced.

Common rail diesel injectors must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

(4) Stack Properly

After the common rail diesel injector is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the common rail diesel injector from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse.

If the common rail diesel injector package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

1 It is forbidden to leave the common rail diesel injector exposed in the air for a long time.

It is forbidden to store acids, alkalis, salts and other substances together with the common rail diesel injector.

injector.

A The unpacked common rail diesel injector must be rust-proof during secondary storage.

2.7. 0445120298 Common Rail Diesel Injector Technical Support Obtaining Methods

- (1) Common Rail Diesel Injector Technical File: <u>https://www.commonraildieselinjector.com/download/</u>
- (2) Common Rail Diesel Injector Videos: <u>https://www.commonraildieselinjector.com/videos/</u>
- (3) Common Rail Diesel Injector Encyclopedia: https://www.commonraildieselinjector.com/category/news/encyclopedia/



3. 0445120298 Common Rail Diesel Injector Purchase and Delivery 3.1. 0445120298 Common Rail Diesel Injector Purchase Payment Term Payment Terms: T/T, PayPal, Alipay, WeChat

A Please contact our salesmen for specific payment information.

3.2. 0445120298 Common Rail Diesel Injector Main Sales Markets

Common Rail Diesel Injector Main Sales Markets: Asia, Europe, North America, South America, Africa etc.

3.3. 0445120298 Common Rail Diesel Injector Declaration Requirements

We can assist customers to provide the following documents for import customs clearance: contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

3.4. 0445120298 Common Rail Diesel Injector Shipping Ways

Destination in China Areas: SF Express, Debon Express, the corresponding logistics company can be provided according to customer requirements in special cases.

Destinations Out of China's Areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

3.5. 0445120298 Common Rail Diesel Injector Lead time

Lead Time: Send out within 3 – 7 working days after receiving payment (Except for special products and special cases).

3.6. 0445120298 Common Rail Diesel Injector Logistics Time for Destination Out of China's Areas DHL Logistics Time :

| Country or Region of Departure | Hong Kong, China | Other Countries or Regions of Asia | Australia and New Zealand | Europe | America | Other Countries |
|-----------------------------------|---------------------|---------------------------------------|------------------------------|--------|--------------|--------------------|
| China's Mainland | 7 Days | 7 Days | 8 Days | 8 Days | 8-12 Days | 7-10 Days |

UPS Logistics Time: Country or Region of Departure: China's Mainland

| Country of Destination | Estimated Arrival Time | Country of Destination | Estimated Arrival Time | Country of Destination | Estimated Arrival Time |
|---------------------------|---------------------------|------------------------|---------------------------|------------------------|---------------------------|
| Japan | 3 Days | UK | 5-7Days | Egypt | 5-7 Days |
| Turkey | 5-7 Days | Singapore | 3 Days | Switzerland | 5-7 Days |
| Bahrain | 5-7 Days | Latvia | 7-10 Days | New Zealand | 7-10 Days |
| Sri Lanka | 5-7 Days | Thailand | 3 Days | Austria | 5-7 Days |
| Romania | 5-7 Days | Vietnam | 3-5 Days | Estonia | 5-7 Days |
| Malaysia | 3-5 Days | Israel | 5-7 Days | Mexico | 7-10 Days |
| France | 5-7 Days | America | 5-7 Days | United Arab Emirates | 5-7 Days |
| Italy | 5-7 Days | Netherlands | 5-7 Days | Bengal | 7-10 Days |
| Lebanon | 5-7 Days | Philippine | 3-5 Days | Greece | 7-10 Days |
| South Korea | 3 Days | Spain | 5-7 Days | Myanmar | 5-7 Days |
| Canada | 5-7 Days | Germany | 5-7 Days | Saudi Arabia | 7-10 Days |
| Portugal | 5-7 Days | Australia | 5-7 Days | South Africa | 7-10 Days |
| Denmark | 5-7 Days | Belgium | 5-7 Days | Ukraine | 7-10 Days |

Website : www.commonraildieselinjector.com



| India | 7-10 Days | Qatar | 7-10 Days | Poland | 5-7 Days |
|-----------|-----------|---------|-----------|----------|-----------|
| Indonesia | 3-5 Days | Morocco | 7-10 Days | Pakistan | 7-10 Days |
| Kuwait | 7-10 Days | | / | / | / |

A The logistics time is for reference only and is subject to the actual arrival.

3.7. 0445120298 Common Rail Diesel Injector Packing

Domestic Express Packaging: Usually wrapped in waterproof scotch tape.

International Express Packaging: Wrapped with waterproof yellow tape after wrapping the black protective film.

Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, also, the products can be packaged according to customers' requirements.

A The packing tray is made of plastic and can be recycled.

Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.

A Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and

white wrapping protective film to avoid personal injury.

| No. | 1 | 2 | 3 | |
|----------------------------|-------------------------------|---|--|--|
| Image | | | | |
| Name | Domestic Express Packaging | International Express Packaging | Pallet Shipping | |
| Wrapped by transparenttape | | Wrapped with yellow tape after wrapping black protective film | Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties | |

4. Company Information





Pic No. 5

4.1. Company Introduction

Mob Phone/WeChat: +86-13410541523

HK Telephone: +852-67653519

Telephone: +86-755-23215133

Shenzhen Office: 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

Shenzhen Office: Exit C, Qiao Touxi Metro Station, NO. 66 Chongqing Road, Fuhai Avenue, Bao'an District, Shenzhen, China Mainland

Hong Kong Office: Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

After-sales Service Address: Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: <u>1.9. 0445120298 Common Rail Diesel Injector Warranty Instructions</u>)

4.2. Contact Information

| | Name | WeChat/ WhatsApp | | |
|---|------|------------------|--|--|
| 1 | Ruby | +86-13410541523 | | |

5. Copyright Statement

The entirety of the material presented on this file "0445120298 Common Rail Diesel Injector Technical File", encompassing but not restricted to text, graphics, logos, icons, images, and video clips, is owned by Shenzhen Shumatt Technology Co., Ltd. along with its content providers.

This material is safeguarded under the robust legal framework of the People's Republic of China and the related international conventions. The "0445120298 Common Rail Diesel Injector Technical File" provided on our website may serve as a reference for visitors. However, it must be noted that any utilization of this content beyond the scope of reference, specifically reproduction, alteration, distribution, transmission, republishing, display, or any form of exhibition, is strictly forbidden without the direct written consent from Shenzhen Shumatt Technology Co., Ltd.

Engaging in unauthorized use of copyrighted material found on this website may lead to a breach of copyright laws. Shenzhen Shumatt Technology Co., Ltd. holds intellectual property rights in high regard and expects the same level of respect from its users. Shumatt reserves the right to initiate legal proceedings and, depending on the severity of the situation, deactivate or terminate the accounts of users who are identified as copyright infringers.

Website : www.commonraildieselinjector.com

19/20